


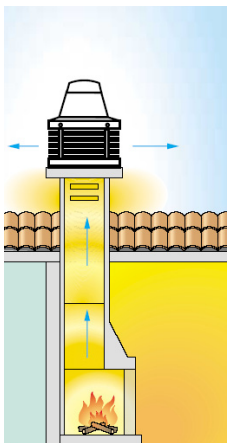
Tiracamino® Chimney Fire Smoke Extract Fans




- The product is designed to extract fire smoke and heat from fire places with the advantage that the unit can be used as a general extraction fan when a fire is not lit.
(The unit is not suitable for Gas fired installations)
- The Tiracamino Chimney fan is fitted with ball bearings making the units suitable for long period of operation.
- The fan is designed to operate at temperatures of approximate 200°C
- Weather proof steel construction with anti-corrosion, polyester resin protection.
- Each unit is supplied with an anchor cable for safe installation.
- Supplied with the fan is a suitable speed controller with a on / off feature.
- Unit complies to CEI EN 60335-2-80 Part 2

Technical Characteristics


Code	Voltage @ 50Hz	W	A	Rpm	m³/h	Pa	Lp dB(a) @ 3m	Inlet Ø	Kg	Insulation	IP
Tiracamino® 15000	220-240	120	0.5	1400	750	186	52	170mm	14.3	 CI 1	X4



Dimensions (mm)

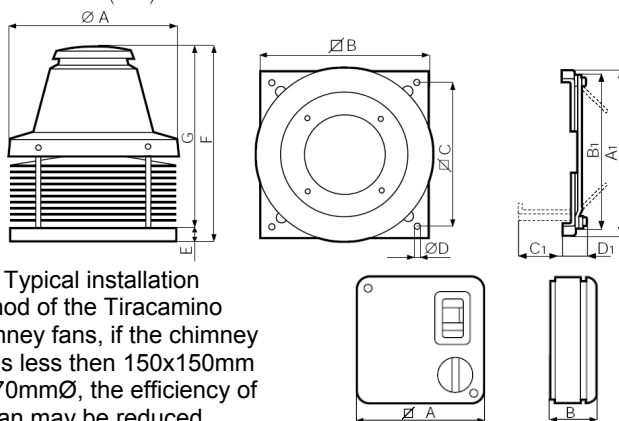

Left: Typical installation method of the Tiracamino Chimney fans, if the chimney flue is less than 150x150mm or 170mmØ, the efficiency of the fan may be reduced.

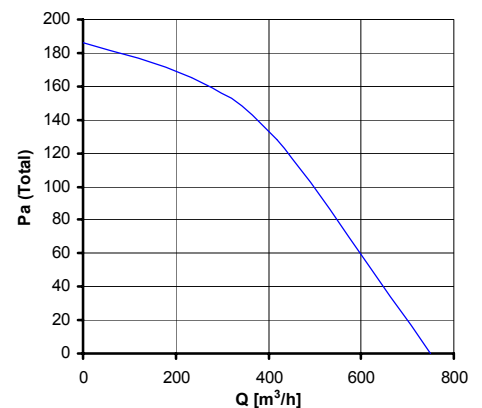

AØ	Bsq	Csq	DØ	E	F	G	A ₁	B ₁	C ₁	D ₁
405	410	357	10	38	518	480	401	357	140	40

Controller	A	B
C 1.5	120	43